


JTPB-F3 Hook(Chain Link) Series Closed Triple Wheels Pulley

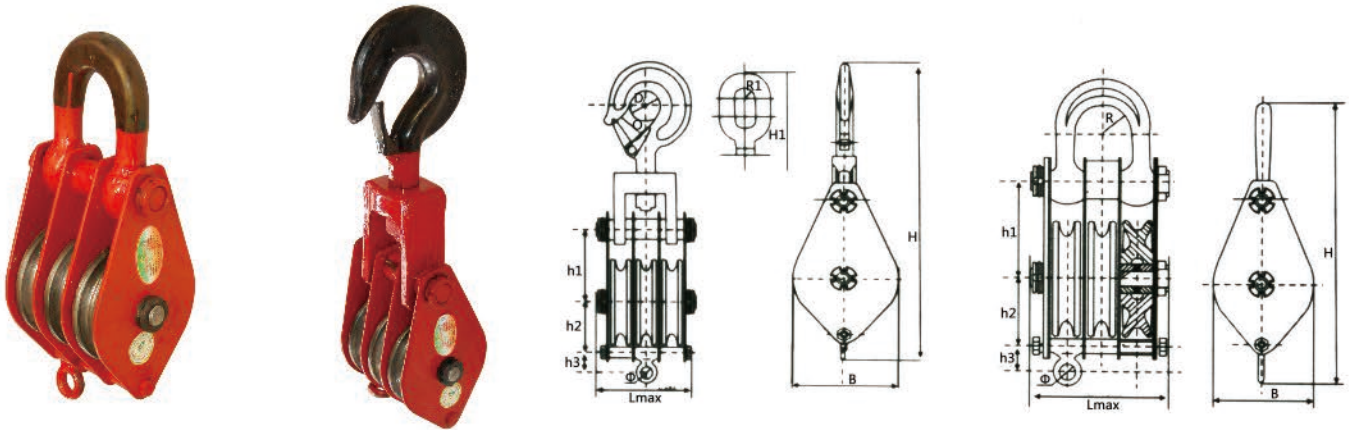

Specifications

Model	Capacity	Test Load	Boundary Dimension					Wire Rope Diameter		The Dimension of Hook Mouth and Ring Cavity				Net Weight
			H	H1	B	Lmax	Φ	Suitability	Max.	D	O	R1	R	
			(mm)							(mm)				
JTPB-F3G3-3.2	3.2	51.2	456	435	116	127	14	7.7	11	50	≥37	21	-	10
JTPB-F3L3-3.2	3.2	51.2	456	435	116	127	14	7.7	11	50	≥37	21	-	14
JTPB-F3G3-5	5	80	575	555	152	152	20	11	14	60	≥42	26.5	-	17.5
JTPB-F3L3-5	5	80	575	555	152	152	20	11	14	60	≥42	26.5	-	14.5
JTPB-F3G3-8	8	128	710	680	176	180	24	12.5	15.5	75	≥56	33.5	-	33
JTPB-F3L3-8	8	128	710	680	176	180	24	12.5	15.5	75	≥56	33.5	-	20
JTPB-F3G3-10	10	160	810	790	212	245	28	15.5	18.5	85	≥61	37.5	-	53
JTPB-F3L3-10	10	160	810	790	212	245	28	15.5	18.5	85	≥61	37.5	-	40.5
JTPB-F3G3-16	16	224	960	920	230	233	32	17	20	106	≥81	50	-	70
JTPB-F3L3-16	16	224	960	920	230	233	32	17	20	106	≥81	50	-	58
JTPB-F3G3-20	20	280	1080	1030	280	258	36	20	23	118	≥90	52.5	-	125
JTPB-F3L3-20	20	280	1080	1030	280	258	36	20	23	118	≥90	52.5	-	82
JTPB-F3G3-32	32	512	1480	1400	580	240	-	35	38	140	≥106	-	-	300
JTPB-F3L3-32	32	512	1480	1400	580	240	-	35	38	140	≥106	-	-	138
JTPB-F3D3-3.2	3.2	51.2	330	-	116	128	14	7.7	11	-	-	-	23.5	14.5
JTPB-F3D3-5	5	80	435	-	152	156	20	11	14	-	-	-	28	15
JTPB-F3D3-8	8	128	515	-	176	186	24	12.5	15.5	-	-	-	33	20.5
JTPB-F3D3-10	10	160	610	-	212	216	28	15.5	18.5	-	-	-	40	41
JTPB-F3D3-16	16	224	680	-	236	233	32	17	20	-	-	-	42	59
JTPB-F3D3-20	20	280	770	-	280	266	36	20	23	-	-	-	47	83
JTPB-F3D3-32	32	448	945	-	364	305	48	26	28	-	-	-	52	140
JTPB-F3D3-50	50	700	1220	-	452	369	56	31	35	-	-	-	64	300