


## JTPB-F2 Hook(Chain Link) Series Closed Double Wheels Pulley

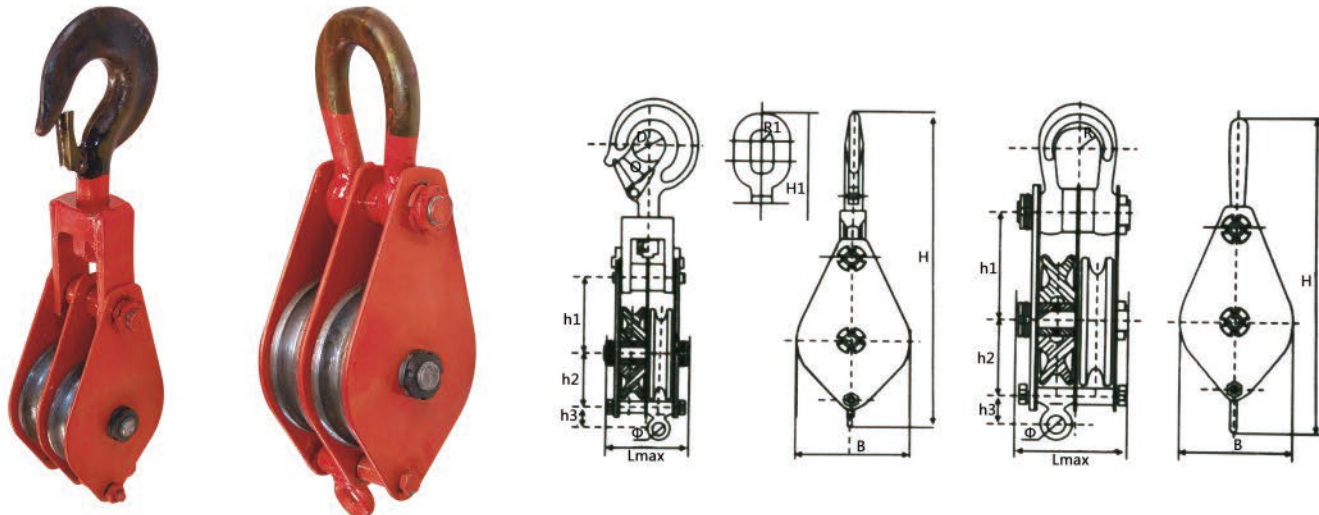

### Specifications

Model	Capacity (t)	Test Load (KN)	Boundary Dimension					Wire Rope Diameter		The Dimension of Hook Mouth and Ring Cavity				Net Weight (kg)
			H	H1	B	Lmax	Φ	Suitability	Max.	D	O	R1	R	
			(mm)							(mm)				
JTPB-F2G2-1	1	16	335	310	98	80	12	6.2	7.7	37.5	>=27	14	-	3.3
JTPB-F2L2-1	1	16	335	310	98	80	12	6.2	7.7	37.5	>=27	14	-	2
JTPB-F2G2-2	2	32	420	395	116	94.5	14	7.7	11	45	>=32	19	-	6.5
JTPB-F2L-2	2	32	420	395	116	94.5	14	7.7	11	45	>=32	19	-	4
JTPB-F2G2-3.2	3.2	51	525	505	152	116	20	11	14	50	>=37	13.5	-	11
JTPB-F2L-3.2	3.2	51	525	505	152	116	20	11	14	50	>=37	13.5	-	8.7
JTPB-F2G2-5	5	80	625	600	176	136	24	12.5	15.5	60	>=42	25	-	19
JTPB-F2L-5	5	80	625	600	176	136	24	12.5	15.5	60	>=42	25	-	14.5
JTPB-F2G2-8	8	128	775	745	212	165	28	15.5	18.5	75	>=56	32.5	-	40
JTPB-F2L-8	8	128	775	745	212	165	28	15.5	18.5	75	>=56	32.5	-	27
JTPB-F2G2-10	10	160	845	825	236	180	32	17	20	85	>=61	35	-	47.5
JTPB-F2L-10	10	160	845	825	236	180	32	17	20	85	>=61	35	-	35
JTPB-F2G2-16	16	224	1090	1055	316	220	42	23	24.5	106	>=81	48	-	75
JTPB-F2L-16	16	224	1090	1055	316	220	42	23	24.5	106	>=81	48	-	70
JTPB-F2G2-20	20	280	1195	1150	364	230	48	26	28	118	>=90	52.5	-	125
JTPB-F2L-20	20	280	1195	1150	364	230	48	26	28	118	>=90	52.5	-	100.5
JTPB-F2G2-32	32	512	1480	1400	580	240	-	35	38	140	>=106	-	-	300
JTPB-F2L-32	32	512	1480	1400	580	240	-	38	38	140	>=106	-	-	199
JTPB-F2D2-1	1	16	245		98	78	12	6.2	7.7	-	-	-	15	2.3
JTPB-F2D2-2	2	32	315		116	94	14	7.7	11	-	-	-	18	4.5
JTPB-F2D2-3.2	3.2	51	400		152	112	20	11	14	-	-	-	22	9
JTPB-F2D2-5	5	80	490		176	132	24	12.5	15.5	-	-	-	26	15
JTPB-F2D2-8	8	128	590		212	163	28	15.5	18.5	-	-	-	32	27.5
JTPB-F2D2-10	10	160	675		236	169	32	17	20	-	-	-	49	36
JTPB-F2D2-16	16	224	805		316	214	42	23	24.5	-	-	-	45	70.5
JTPB-F2D2-20	20	280	930		364	223	48	26	28	-	-	-	48	101
JTPB-F2D2-32	32	448	1145		452	270	56	31	35	-	-	-	50	200