



JTHW-B Hand Winch

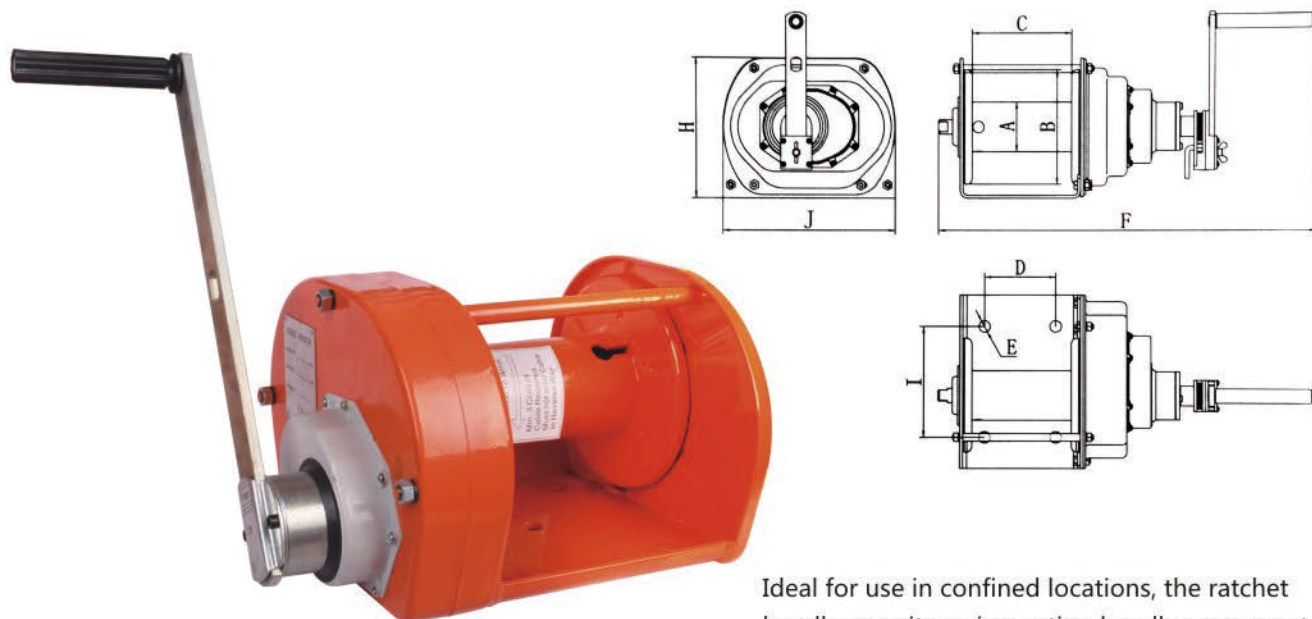

Ideal for use in confined locations, the ratchet handle permits reciprocating handle movement in both directions for hoisting and lowering loads.

Model
0.5t/1t

2t/3t

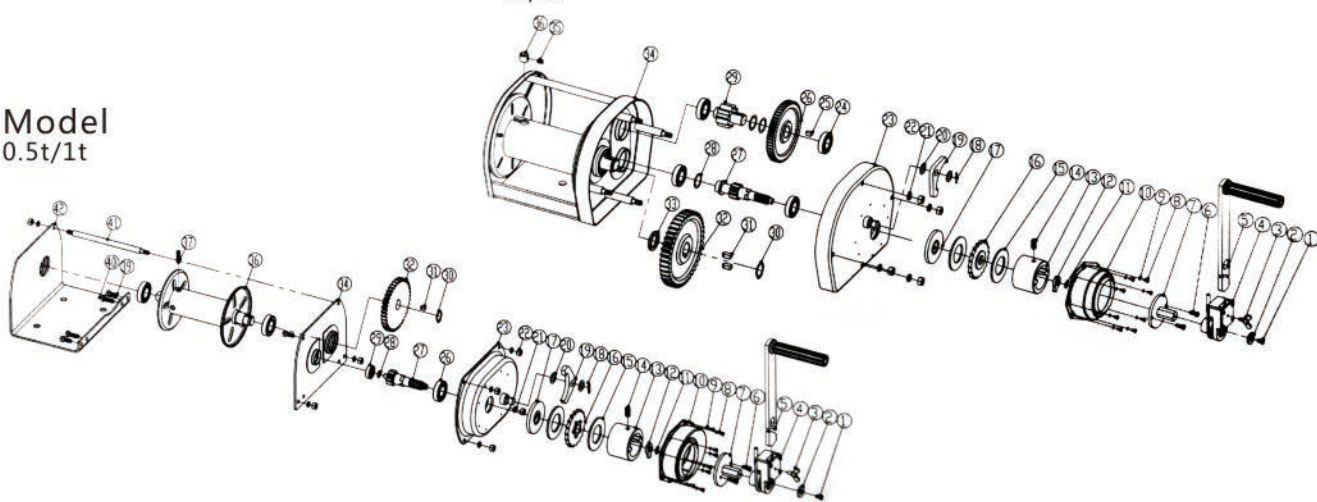

Specifications

Model	Safe Working Load (t)	Test load (KN)	Adopted wire rope dia.×length (m)	Transmission ratio	The max length of link-pole action (mm)	Min.force of hand turn (N)	Dimensions(mm)									Net weight (kg)
							A	B	C	D	E	F	H	I	J	
0.5t	0.5	6.125	Φ6.3×40	4.33:1	350	120	Φ60	Φ140	150	100	Φ15	403	182	130	245	14.4
1t	1	12.25	Φ8×40	12.19:1	350	120	Φ76	Φ175	154	110	Φ18	443	214	170	266	19.7
2t	2	24.5	Φ9×40	22.68:1	350	130	Φ90	Φ190	195	155	Φ18	490	230	170	300	25.1
3t	3	36.75	Φ12.5×40	29.16:1	350	180	Φ100	Φ230	205	155	Φ18	549	296	170	365	44.3