

JTDC-F Open Type Electronic Hanging Scale

Specification

Manual zero range:4%F.S.
 Peeled range:20%F.S.
 Stable time:≤10s
 The alarm value of overload:100%F.S.+9e
 Charge of surety:125%F.S.
 Ultimate load:400%F.S.
 Continuous use of time:≥50h
 Source:6V/4.5Ah
 Charger:DC6V/1000mA
 Operating temperature range:-10°C~+40°C
 Remote control receiver distance:10m
 Remote power supply:7# (AAA Battery 1.5V×2)


Features

Zero/total/keep
 Automatic zero tracking
 Overload alarm
 Anti sway effect
 Aluminium alloy shell
 5 large digital tube display (30mm high letters)
 Dividing the value optional
 The battery voltage automatic detection
 Low battery warning and auto power off function



Capacity and Division

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)	N.W (kg)	Packing Size
JTDC-F-2	90	250	40	180	130	420	10.5	54×29×22
JTDC-F-3	90	250	40	180	130	420	11.5	54×29×22
JTDC-F-5	100	250	50	180	130	460	17.5	64×29×22
JTDC-F-10	130	250	70	180	130	560	27.5	69×35×26.5
JTDC-F-15	225	345	70	240	165	855	49	42.5×35.5×37
JTDC-F-20	225	345	85	240	165	920	56	42.5×35.5×37

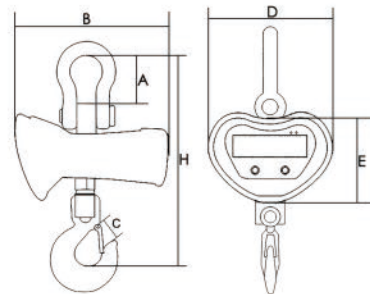

078

JENTAN