



## JTMJ-A Model Mechanical Jack

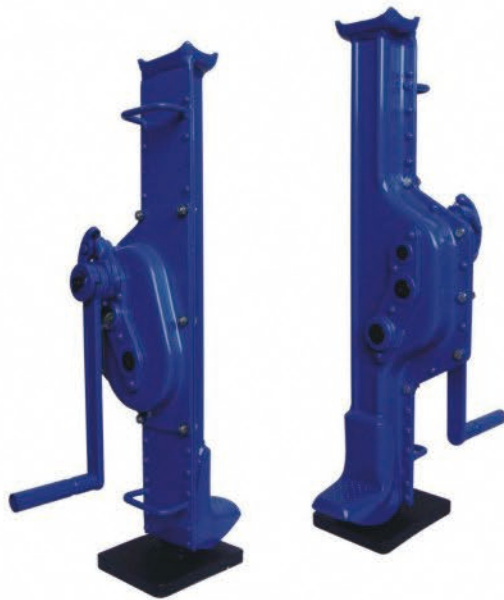

### Product introduction

- Double pawl brake system-quick braking, safe and reliable.
- Low gearing tolerance-smooth transmissions, free of jerks.
- High efficiency and minimum turning force less than 25kgs is required to lift full load of all rated capacity.
- Sturdy structure, light weight and quick lift performance material high quality CRS plate, carburized alloy steel gears.
- The forge steel jack is designed and developed for heavy industrial lifting applications, strictly in accordance with the latest safety standard DIN 7355.

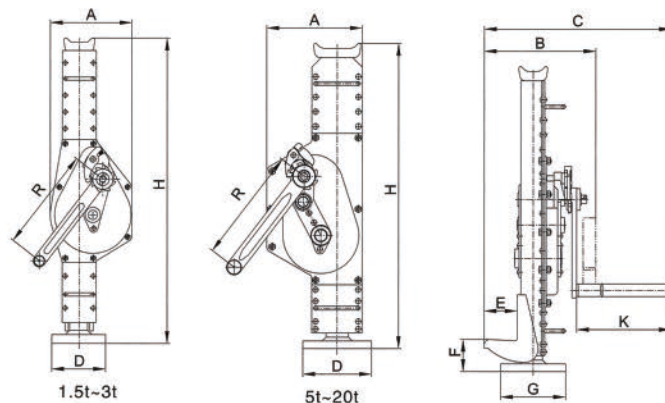

### Specifications

Model	1.5t	3t	5t	10t	16t	20t	25t	
Rated capacity	(t)	1.5	3	5	10	16	20	25
Test load	(KN)	18.4	36.8	61.3	122.5	196	245	206.3
Chain shake to lift full load	(N)	150	280	280	560	640	640	640
Stroke	(mm)	300	350	350.00	410	320	320	320
Min.lifting height(mm)	F	60	70	80	85	95	100	110
	H	600	730	730	800	800	800	970
Dimensions(mm)	A	163	197	189	250	250	275	350
	B	190	200	239	293	293	335	340
	C	273	296	335	498	498	529	538
	D	100	130	140	140	140	150	170
	E	55	60	71	86	88	78	80
	G	110	140	170	170	170	180	200
	K	113	127	127	248	248	250	250
	R	225	250	275	300	300	380	380
Net weight	(kg)	13.5	21.2	28.5	46.8	46.8	75	91