


JTCJ Claw Jack

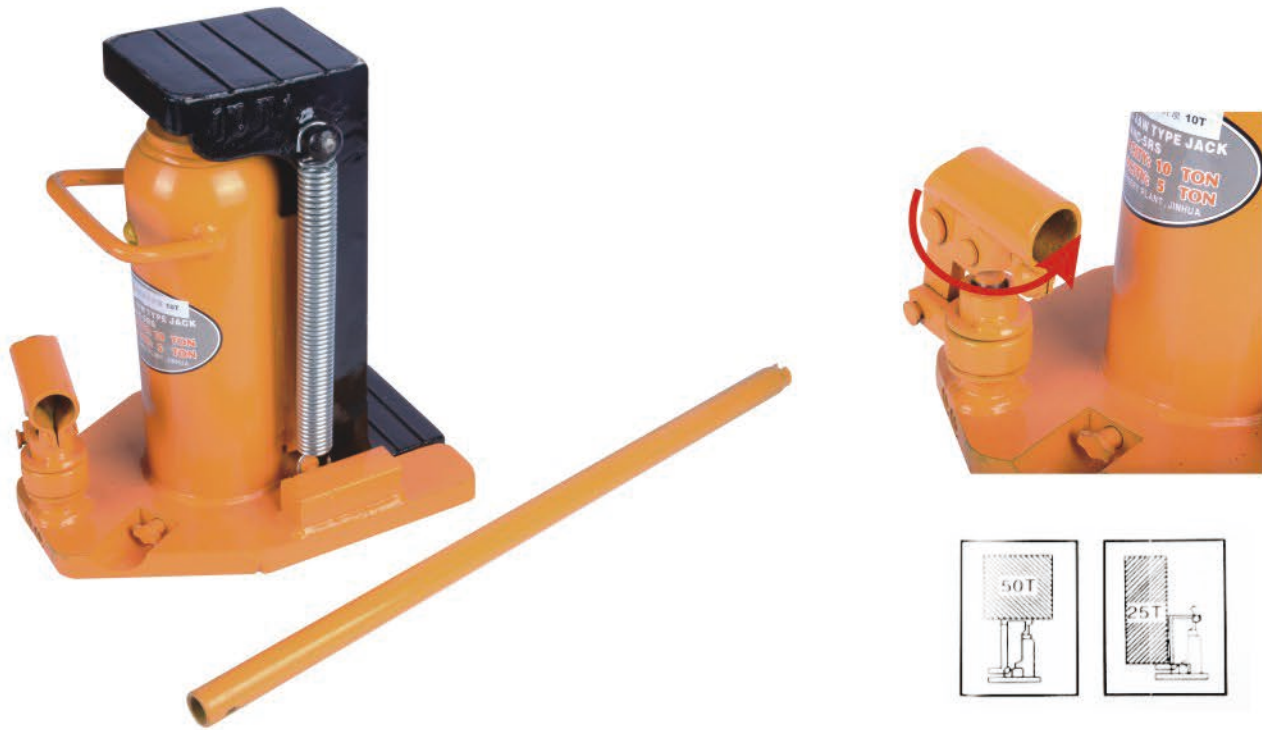

Product introduction

- Heavy-duty, industrial quality, dual purpose jack.
- Designed for lifting loads with very low minimum clearances (foot) or high clearances (head).
- Ideal for house moving, machinery installation and Application at shipyard, bridge building or plant construction sites.
- Great companion tool for machinery type rollers.
- Convenient 200½ swivel socket for easy operation.
- Safety valve for overload protection.
- Features spring assisted return and over-travel protection on 5 or 10 ton models.
- Ram is made of heat treated special steel to resist rust and assure strength.
- Electrically welded base and cylinders to assure strength.
- Not affected by temperature extremes.
- Pump handle included.
- Complies with ANSI/ASME B30.1 standards.

Specifications

Model	Capacity	Stroke	Coll Height	Ext.Height	Toe Height	Toe-lift base	N.W.
	(Ton)	(mm)	(mm)	(mm)	(mm)	L×W (mm)	(kg)
JTCJ-5	5	117	230	317	18	69×45	8.5
JTCJ-10	10	147	280	387	22	98×55	20
JTCJ-20	20	152	310	462	25	123×63	31
JTCJ-30	30	155	330	485	28	149×60	42
JTCJ-50	50	155	370	525	40	190×75	85