



## JTR-ST01 U.S.TYPE Grooved Open Spelter Sockets (US416)

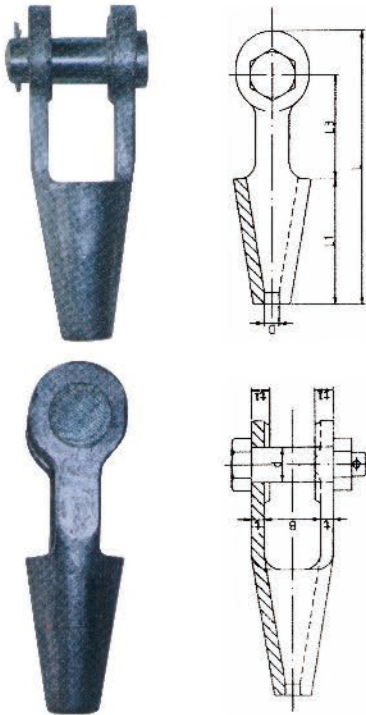

Diameter (in)	Dimensions (mm)					
	A	C	D	F	J	L
1/4	115.8	23.1	17.5	9.7	57	40
5/16-3/8	123	20.6	20.6	12.7	57	44.5
7/16-1/2	141.2	25.4	25.4	14.2	64	51
9/16-5/8	171.5	32	30	17.5	76	64
3/4	202	38.1	38.1	20.6	89	76
7/8	235	44.5	44.5	23.9	102	89
1	268	50.8	50.8	38.7	114	102
1-1/8	300	57.2	57.2	31.8	127	117
1-1/4-1-3/8	335	63.5	63.5	38.1	140	127
1-1/2	384	70	70	41.4	152	152
1-5/8	413	76.2	76.2	44.5	165	165
1-3/4-1-7/8	464	89	89	51	191	178
2-2-1/8	546	102	95.3	57	216	229
2-1/4-2-3/8	597	114.3	108	63.5	229	254
2-1/2-2-5/8	648	127	120.7	73	248	273
2-3/4-2-7/8	692	133.4	127	79	279	279
3-3-1/8	737	146	133.4	86	305	286
3-1/4-3-3/8	784	159	140	92	330	298
3-1/2-3-5/8	845	171.5	152.4	98.6	356	318
3-3/4-4	921	191	177.8	108	381	343

## JTR-ST02 U.S.TYPE Grooved Closed Spelter Sockets (US417)

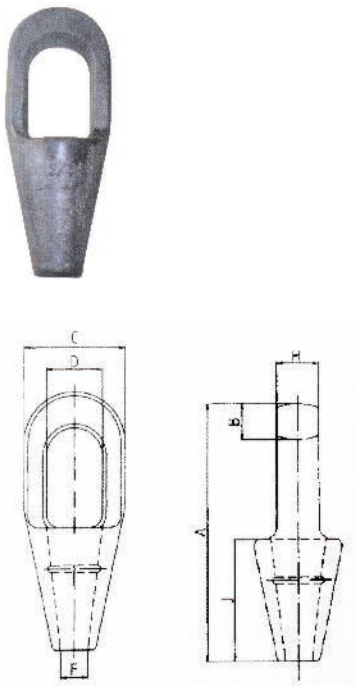

Diameter (in)	Dimensions (mm)						
	A	B	C	D	F	J	H
1/4	11.43	12.7	38	22.4	9.7	57	13
5/16-3/8	124	16	43	24.6	12.7	57	18
7/16-1/2	138.2	18	51	30	14.2	64	22
9/16-5/8	160.3	21	67	36	19.5	76	25
3/4	192	27	76	42	20.6	89	32
7/8	222.3	32	92	48	23.9	102	38
1	251	35	105	58	28.7	114	44
1-1/8	279	38	114	65	31.8	127	51
1-1/4-1-3/9	308	41.4	135	71.4	38.1	140	57
1-1/2	354	49	135	81	41.4	152	64
1-5/8	384	54	146	83	44.5	165	70
1-3/4-1-7/8	438	56	171	95	51	191	76
2-2-1/8	495	62	194	111	57	216	83
2-1/4-2-3/8	537	67	216	127	63.5	229	92
2-1/2-2-5/8	597	79	241	140	73	248	102
2-3/4-2-7/8	645	79	273	159	79	279	124
3-3-1/8	686	83	392	171	86	305	133
3-1/4-3-3/8	743	102	311	184	92	330	146
3-1/2-3-5/8	787	102	330	197	98.6	356	159
3-3/4-4	845	108	362	216	108	381	178