


JTCK Chain Block

Introduction

- Small size, light weight, easy to carry.
- The adoption of low-alloy structural steel plates, more safe and long service life.
- Grade 80 high strength load chain, High safety factor, Long service life.
- Steady rotation, high efficiency, light hand pulling force
- Approved by CE, GS certificate.
- Double pawls, double load chain guide wheel ensure the safe working.
- Overload protection optioned.



Overload Protection Device

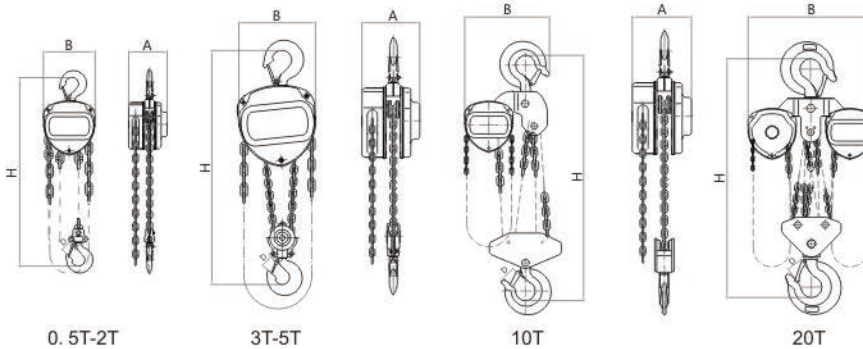

0.5T-2T

3T-5T

10T

20T

Specifications

Model	Capacity (T)	Standard Lift (m)	Running test (T)	Effort required to lift max load (N)	No. of falls of load chain	Load chain diameter (mm)	Dimension (mm)				Net weight (kg)	Packing (L*W*H) (cm)
							A	B	H	D		
JTCK-0.5T	0.5	2.5	0.75	200	1	6	113	125	255	28	9	22*15*14
JTCK-1T	1	2.5	1.5	304	1	6	126	147	306	32	11.5	25*19*15
JTCK-1.5T	1.5	2.5	2.25	343	1	6	141	183	368	36	17.5	25*19*15
JTCK-2T	2	3	3	304	2	6	141	183	368	36	16	31*21*17
JTCK-3T	3	3	4.5	343	2	8	141	183	486	46	27	34.5*24*16
JTCK-5T	5	3	7.5	414	2	10	163	215	616	46	43	40*30*17
JTCK-10T	10	3	15	423	4	10	163	404	750	57	75	48*42*18.5
JTCK-20T	20	3	30	435*2	8	10	191	595	1000	81	185	78*68*20