


## JTHT-A Hydraulic Hand Pallet Truck

### Product introduction


The Hand Pallet truck is the ideal "storage aid" and "handling partner" for all manual transport tasks over short distance, excellently suitable for use on lorries, in small warehouse and markets etc.

### Specifications

Model	JTHT-A 2.0	JTHT-A 2.5	JTHT-A 3.0
Capacity(kg)	2000	2500	3000
Min.fork height(mm)	85/75	85/75	85/75
Max.fork height(mm)	195/185	195/185	195/185
Lifting height(mm)	110	110	110
Fork height(mm)	1150/1220	1150/1220	1150/1220
Single fork height(mm)	160	160	160
Width overall forks(mm)	550/685	550/685	550/685
Fork wheel-single(mm)	Φ80X93/74X93	Φ80X93/74X93	Φ80X93/74X93
Fork wheel-tandem(mm)	Φ80X70	Φ80X70	Φ80X70
Steering wheel(mm)	Φ180X50	Φ180X50	Φ180X50
Truck weight(kg)	73-92	73-92	73-92
Qty/20 feet container(pcs)	180/144	180/144	180/144

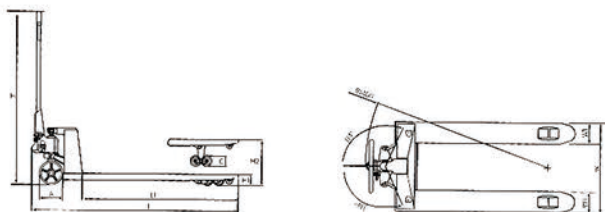

## JTHT-A Hydraulic Hand Pallet Truck



- 1.Lower position  
Pull up the fingertip for lowering.
- 2.Neutral Position  
Keep in the position to push&pull the truck.
- 3.Lifting Position  
Push down the fingertip for pump lifting.



- The body is designed by the integral steering. Its rotating shaft's joint is made of high quality NTN. It allows a more flexible and light and even can open angle reached 210 degrees.
  - Reinforced for added strength of load capacity.
  - Effortless pallet entry/exit rollers to make it easier to push and pull pallet truck.
- Simple / Flexible / Safety / Durability1. The sealing parts is import2. Chrome plated piston rod3. With overload protection device4. High quality full sealed oil pump.

### Steering

Easy to maneuver with 210 degrees turning radius. All pivots points are greased ensure excellent maneuverability with effortless steering.

### Spray finishing

Standard painting system ensures the best power coating and painting quality

### Controlled speed

Speed lowering valve can adjust the descent speed freely

### Reliable construction

Heavy gauge steel construction, drop forged lift link arms provide available strength and durability.

### Easy lowering operation

Foot and hand control the lowering function to ensures easy operation.

### Overload protection

Excellent and compact pump design with high-pressure relief valve to prevent overload.

### Options

Color available in red, yellow, blue and others.  
Different fork lengths and widths available.  
Obtainable with rubber, nylon or polyurethane steering wheels.  
Rollers available in nylon or polyurethane.  
Available with Handle A and Handle B.